

FIBRA FRESADA 35 X 0.65 MM

FIBRAS METÁLICAS


ESPECIFICACIÓN TÉCNICA

Dimensions

Wire diameter	(d)	0.65 mm	(± 0.04 mm)
	(d1)	> 0.50 mm	
	(d2)	< 0.90 mm	
Fibre length (L)		35.0 mm	(+2/-3 mm)
Width of flattened ends (B)		≥ 1.30 mm	
Length of flattened ends (e1 & e2)		1.50 mm	(± 1.50 mm)
Aspect ratio (L/d)		54	
Number of fibres per kg		10900	
Total fibre length per 10 kg		3841 m	

Material characteristics

- Tensile strength of drawn wire
1150 N/mm²

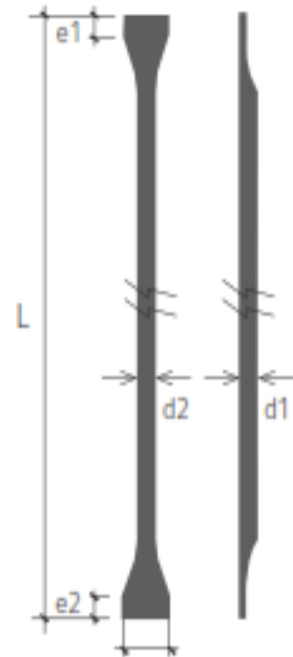

Packaging

Recyclable cardboard boxes

Net weight/box 25 kg

Boxes/palette 48

Weight/palette 1200 kg

The fibres are oriented in one direction

Palettes are wrapped or welded in a plastic folio

Available also from stock in big bag of 1000 kg (500 kg on demand)

Miscellaneous

The described fibre is in accordance with the following standards:

- EN 14889-1 type 1, cold-drawn wire
- ASTM A820/A820M-04 type I, cold-drawn wire